


# METAL ROOF *Sealant*

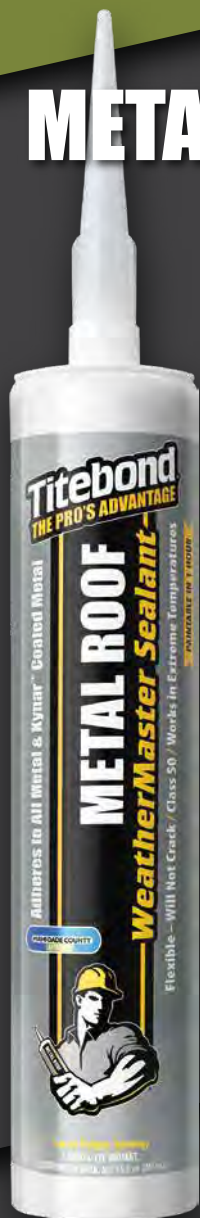

Titebond® WeatherMaster™ Metal Roof Sealant offers unbeatable adhesion to all metals including Kynar™ coated metals and most common building materials. It can be extruded in extreme temperatures and adheres well to wet and damp surfaces.

## Ideal For

Sealing metal roofs, windows, doors, siding, gutters and vents.

## Seals

Kynar™ coated metals, aluminum, galvanized steel, copper, PVC, wood, concrete, masonry, stucco, wall panels, vinyl, glass, plastic, siding, flashing, sheet metal and most common building materials. It is an exact color match to PRO-SNAP® and PRO-RIB® panels.

## Ordering Information

9.5 oz. Cartridge / White with removable nozzle

## 100+ Colors Available



20 oz. Sausage Packs / White

## 11 Colors Available

## Performance



## Joint Movement

This sealant formula is capable of  $\pm 50\%$  joint movement

## Applications

Application Temperature

Above 0°F (-18°C)

Tooling Time

For a 1/4" bead, approx 10-15 minutes, depending on temperature & humidity

Painting

Sealant is intended for exterior use. If used indoors, sealant may need to be painted. Painting may occur one hour after application with a water-based (latex-based) paint\*. For other paint types, a compatibility test is recommended.

\* Titebond WeatherMaster Metal Roof Translucent (61111) is a neutral cure silicone and NOT paintable.

## Specifications

ASTM C920 Type S Grade NS Class 50 Use T, NT, M, A & G

Federal Specification TT-S-00230C Type II Class A (White, Colors and Crystal Clear)

CAN/CGSB-19 13-M87 Classification MCG-2-25-A-N (White, Colors and Crystal Clear)

USDA Compliant

## Color Matching Program

Titebond is one of the only sealant manufacturers to offer a unique color matching program. Our 100+ colors are specifically matched to today's most popular metal colors, including PRO-SNAP® and PRO-RIB® panels. If you cannot find the perfect match for your application, please contact us at 1.800.347.4583 and we will provide you with an exact match.

MIAMI-DADE COUNTY  
APPROVED

Approved for use on buildings in both Miami-Dade County and throughout the country. Product passed stringent third-party testing to meet requirements of use in high-wind areas.

